

## GREENMAX™ COMPACTOR POSEIDON C900



> Screw Compression Technology enables continuous output at a ratio of 8:1, high density and security, low utility consumption.



> Reputable & High quality components make the machine reliable and durable



> Water draining function squeezes out the liquid to the water collection tray.



> Water collection tray is made of acid-resistant stainless steel to withstand the low PH in many liquids.



> SIEMENS control system guarantees easy and simple operation.




> CE approved and comply with UL/CSA standards

### > APPLICABLE MATERIAL:

	PET BOTTLES	ALUMINUM CANS	PE/PP FILM	BEVERAGE CARTONS	YOGURT CUPS
<b>MATERIAL</b>					
<b>FEED IN /HOUR</b>	12000pcs/0.5L 5000pcs/1.5L 4000pcs/2.0L 3000pcs/2.5L	12000pcs/0.33L	----	8000pcs/0.25L	20000pcs/0.1L
<b>OUTPUT /HOUR</b>	appr. 350kg 770 lbs	appr. 350kg 770 lbs	appr. 700-800kg 1543-1763 lbs	appr. 350kg 770 lbs	appr. 200kg 440 lbs

> DIMENSIONS

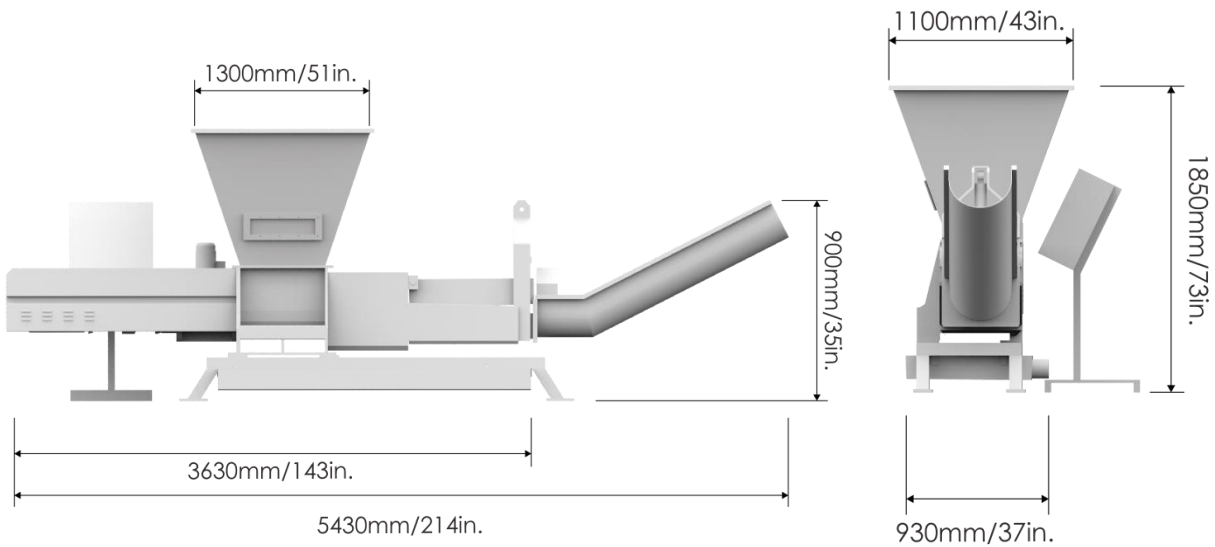

> TECHNICAL DATA

ITEM	P-C350
Total Power Consumption	15.55 kw / 20.9 hp
Screw Rotation Speed	30rad / min
Screw Reduction ratio	50:1
Bottle Volume Reduction	10:1
Compressed PET Density	250 kg/m <sup>3</sup> / 510 lbs/cubic yard
Feed Hopper Door	1300*1100*1850 (l/w/h) mm / 51.2*43.3*72.8 (l/w/h) in.
Dimensions	5430*1100*1850 (l/w/h) mm / 213.8*43.3*72.8 (l/w/h) in.
Shipping Dimensions	Main part: 3730*1200*2050 (l/w/h) mm / 146.9*47.2*80.7 (l/w/h) in. Output chute: 1900*550*600 (l/w/h) mm / 74.8*21.7*23.6 (l/w/h) in.
Weight	2,000 kg / 4,409 lbs