

GREENMAX™ COMPACTOR POSEIDON C900



> Screw Compression Technology enables continuous output at a ratio of 8:1, high density and security, low utility consumption.



> Reputable & High quality components make the machine reliable and durable



> Water draining function squeezes out the liquid to the water collection tray.



> Water collection tray is made of acid-resistant stainless steel to withstand the low PH in many liquids.



> SIEMENS control system guarantees easy and simple operation.




> CE approved and comply with UL/CSA standards

> APPLICABLE MATERIAL:

	PET BOTTLES	ALUMINUM CANS	PE/PP FILM	BEVERAGE CARTONS	YOGURT CUPS
MATERIAL					
FEED IN /HOUR	30000pcs/0.5L 12000pcs/1.5L 10000pcs/2.0L 8000pcs/2.5L	30000pcs/0.33L	----	20000pcs/0.25L	50000pcs/0.1L
OUTPUT /HOUR	appr. 900kg 1980 lbs	appr. 900kg 1980 lbs	appr. 1800-2000kg 4000-4400 lbs	appr. 900kg 1980 lbs	appr. 500kg 1100 lbs

> DIMENSIONS

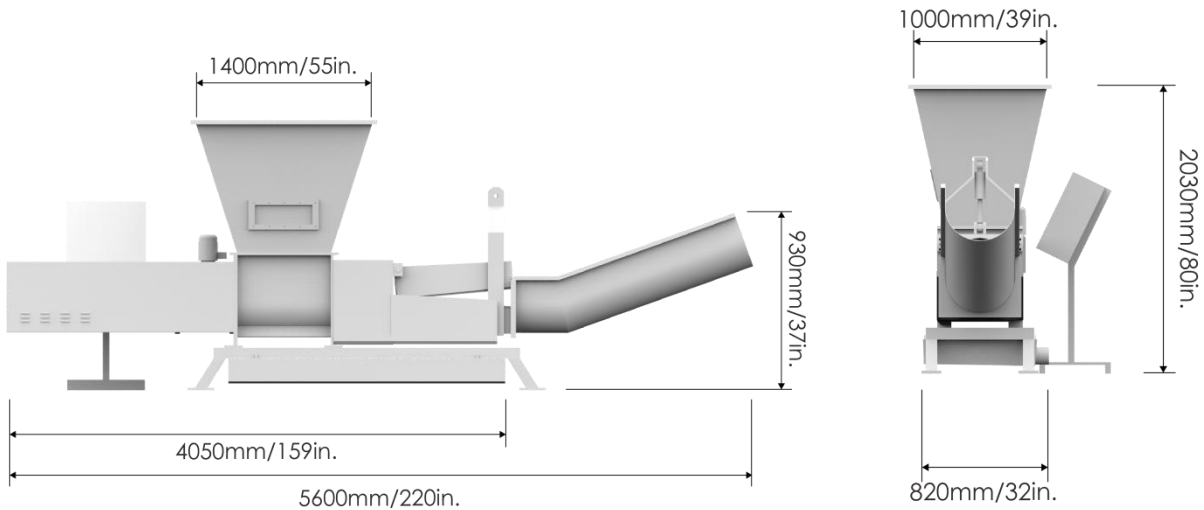

> TECHNICAL DATA

ITEM	P-C900
Total Power Consumption	22.55 kw / 30.2 hp
Screw Rotation Speed	30rad / min
Screw Reduction ratio	50:1
Bottle Volume Reduction	10:1
Compressed PET Density	250 kg/m ³ / 510 lbs/cubic yard
Feed Hopper Door	1400*1000*2030 (l/w/h) mm / 55.1*39.4 *79.9 (l/w/h) in.
Dimensions	5600*1000*2030 (l/w/h) mm / 220.5*39.4*79.9 (l/w/h) in.
Shipping Dimensions	Main part: 4150*1100*2230 (l/w/h) mm / 163.4*43.3*87.8 (l/w/h) in. Output chute: 1650*780*600 (l/w/h) mm / 65.0*30.7*23.6 (l/w/h) in.
Weight	2,200 kg / 4,850 lbs